


Licensed Spectrum

LRS140 Industrial 1.4 GHz Data Radio



LRS-140CSU

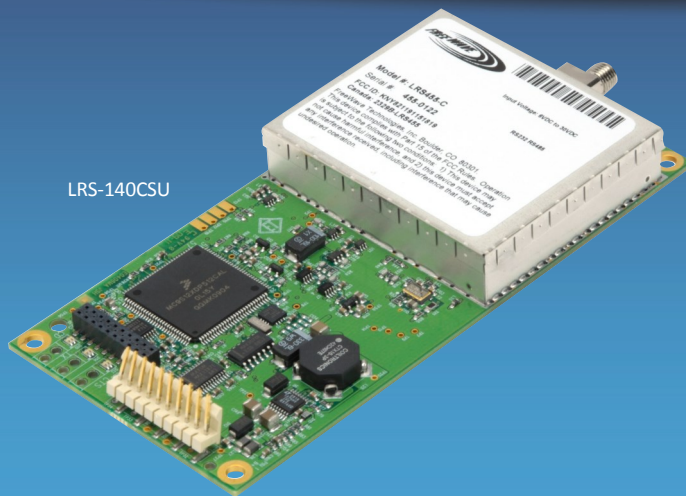

LRS-140RC

Key Features

High Speed: 19.2 kbps throughput

Long Range: 30 mile range with clear line of sight

Error Free Communication: 32 bit CRC with automatic retransmission

Industrial Grade Specifications: 100% tested for RF performance from -30°C to $+60^{\circ}\text{C}$

Input Voltage Range: +6.5 VDC to +30 VDC at full RF output power. Receive current is less than 90 mA @ 12 VDC

Separate Diagnostic: Serial connector allows real-time local diagnostics and setup menu access

Diagnostics: Include signal level in dBm and transmit current

Noise Immunity: Superior performance in noise congested environments

1.427 to 1.432 GHz licensed radios are available with a user-programmable RS232/RS485/RS422 interface

Overview

FreeWave Technologies offers a licensed band radio in the recently approved 1.4 GHz band. This radio has applications wherever radios are preferred ranging from Oil & Gas to municipalities and more. This OEM product has tremendous flexibility for use in applications around the world. The LRS140 is offered as a board level product (LRS140-CSU) and in an enclosure (LRS140-RC)

All radios are designed, manufactured and tested in Boulder, Colorado

Specifications

MODEL	FORM FACTOR	OPTIONS
LRS-140CSU	128 L x 61.8 W x 19.7 H (mm)	Board Level
LRS-140RC	173 L x 105 W x 35 H (mm)	Ruggedized Enclosure



LRS140 Industrial 1.4 GHz Data Radio: Technical Specifications

TRANSMITTER

Frequency Range	1.427 to 1.432 GHz
Output Power	Programmable to 611 mW
Data Link Range	30 miles, clear line of sight
Modulation	2 and 4 level GFSK
Occupied Bandwidth	12.5 kHz, 25 kHz
Frequency Channels	200 Channels @ 25 kHz, 400 Channels @ 12.5 kHz

RECEIVER

Sensitivity	-108 dBm for BER 1x 10 ⁻⁶ (2 level GFSK) -98 dBm for BER 1x10 ⁻⁴ (4 level GFSK)
Selectivity	20 dB at fc +/- 460 kHz (2nd IF)
System Gain	136 dB at 2 level GFSK; 126 dB at 4 level GFSK

DATA TRANSMISSION

Error Detection	32 bit CRC, retransmit on error
Link Throughput	9.6 kbps at 2 Level GFSK; 19.2 kbps at 4 level GFSK
Data Interface	Serial
Protocol	RS232/RS485/RS422
Data Connector	Board Level: 10-pin header with locking ramp, 0.1 inch spacing, power/data connector Ruggedized Enclosure: 3-pin PCB header

DIAGNOSTICS

Connector	SMA, TNC-Enclosed version only (female connectors)
-----------	---

POWER REQUIREMENTS

Operating Voltage	+6.5 VDC to +30 VDC
-------------------	---------------------

+6.5 VDC Typical Current

Transmit: 1 A	Receive: 150 mA	Idle: 40 mA
---------------	-----------------	-------------

+12 VDC Typical Current

Transmit: 500 mA	Receive: 90 mA	Idle: 30 mA
------------------	----------------	-------------

+30 VDC Typical Current

Transmit: 200 mA	Receive: 12 mA	Idle: 12 mA
------------------	----------------	-------------

GENERAL INFORMATION

Operating Temperature	-30°C to +70°C
-----------------------	----------------

Humidity	0 to 95% non-condensing
----------	-------------------------

Dimensions	Board Level: 128 L x 61.8 W x 19.7 H (mm)
	Ruggedized Enclosure: 173 L x 105 W x 35 H (mm)

Weight	Board Level: 74.4 g
	Ruggedized Enclosure: 604.4 g

Antenna Connector	Board Level: SMA
	Ruggedized Enclosure: TNC

LRS140 Industrial 1.4 GHz Data Radio: Applications



Oil and Gas



Agriculture



Utilities



SCADA



Mining



Fleet
Management



Municipal



Enterprise

Contact your FreeWave reseller or sales rep for implementation details.

FreeWave Technologies, Inc.

5395 Pearl Parkway, Suite 100, Boulder, CO 80301

TF 866.923.6168

T 303.381.9200

For more information, visit www.freewave.com

Specifications are subject to change without notice.

©2014 FreeWave Technologies, Inc. All rights reserved.

