


Licensed Spectrum

LRS455 Serial Data 435-470 MHz Radio



LRS455-C
LRS455-T

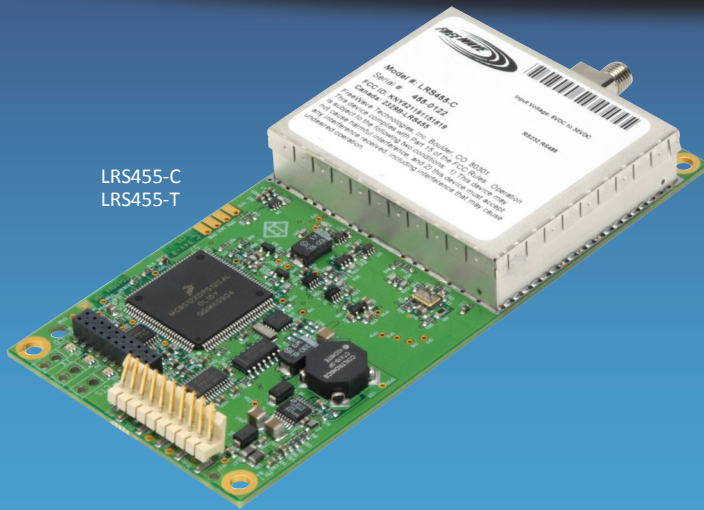

LRS455-CE

Key Features

User-Selectable: Across the 435 to 470 MHz spectrum

Reliable: 100% tested for RF performance from -30°C to +60°C

Flexible: User-programmable — RS232/RS422/RS485 serial data interface

Long Range: Up to 70 miles with clear line of sight and with the ability to extend even further through the use of a Repeater

Versatile: A single radio can operate simultaneously as an Endpoint or Repeater

High Speed: Up to 18 kbps throughput on a single 12.5 kHz RF channel

Error Free Communications: 32 bit CRC with automatic retransmission

Input Voltage Range: From +6 to +27 VDC, receive mode requires less than 110 mA @12 VDC

Noise Immunity: Superior performance in noise congested environments

Overview

The FreeWave board level and enclosed LRS455 radios provide outstanding performance and versatility. The LRS455 offers a cost effective solution that allows customers to incorporate wireless communications into a wide variety of applications.

The small footprint of the board level version is ideal for internally mounted applications. The LRS455 is also offered in a surface mount design, and no additional RF shielding.

All radios are designed, manufactured and tested in Boulder, CO.

Specifications

MODEL	FORM FACTOR	OPTIONS
LRS455-C	128 L x 61.8 W x 19.7 H (mm)	Board Level
LRS455-T	128 L x 61.8 W x 19.7 H (mm)	Board Level
LRS455-CE	173 L x 112 W x 35 H (mm)	Ruggedized Enclosure



LRS455 Serial Data 435-470 MHz Radio: **Technical Specifications**

TRANSMITTER

Frequency Range	435 to 470 MHz
Output Power	Programmable to 2 W
Data Link Range	70 miles, clear line of sight
Modulation	2 and 4 level GFSK
Occupied Bandwidth	12.5 kHz
Frequency Channels	5,600 channels @ 6.25 kHz

RECEIVER

Sensitivity	-112 dBm, standard speed, 1×10^{-4}
-------------	--

DATA TRANSMISSION

Error Detection	32 bit CRC, retransmit on error
Data Throughput	18 kbps, at high speed RF data rate 9 kbps, at standard speed RF data rate
Data Interface	Serial, 1200 bps to 230.4 kbps
Protocol	Board Level: RS232/RS485/RS422 (-C) TTL (-T) Ruggedized Enclosure: RS232/RS422/RS485
Data Connector	Board Level: 10-pin header with locking ramp, 0.1 inch spacing, power/data connector Ruggedized Enclosure: DB9 female, DCE

DIAGNOSTICS

Connector	Board Level: 20-pin PCB header Ruggedized Enclosure: 3-pin header
-----------	--

POWER REQUIREMENTS

Operating Voltage	+6 VDC to +27 VDC
-------------------	-------------------

+6 VDC Typical Current

Transmit: 1.5 A	Receive: 200 mA	Idle: 50 mA
-----------------	-----------------	-------------

+12 VDC Typical Current

Transmit: 750 mA	Receive: 100 mA	Idle: 25 mA
------------------	-----------------	-------------

+27 VDC Typical Current

Transmit: 340 mA	Receive: 145 mA	Idle: 12 mA
------------------	-----------------	-------------

GENERAL INFORMATION

Operating Temperature	-30°C to +60°C
Humidity	0 to 95% non-condensing
Dimensions	Board Level: 128 L x 61.8 W x 19.7 H (mm) Ruggedized Enclosure: 173 L x 105 W x 35 H (mm)
Weight	Board Level: 74.4 g Ruggedized Enclosure: 605 g
Antenna Connector	Board Level: SMA female Ruggedized Enclosure: TNC female
Certifications	FCC Part 90, UL Class 1, Div 2

LRS455 Serial Data 435-470 MHz Radio: **Applications**



Oil and Gas



Agriculture



Utilities



SCADA



Mining



Fleet Management



Municipal



Enterprise

Contact your FreeWave reseller or sales rep for implementation details.

FreeWave Technologies, Inc.

5395 Pearl Parkway, Suite 100, Boulder, CO 80301

TF 866.923.6168

T 303.381.9200

For more information, visit www.freewave.com

Specifications are subject to change without notice.

©2014 FreeWave Technologies, Inc. All rights reserved.

